



# Chroma-Q™ Magic Box™ 8 Way DMX Buffer

**Part No:  
CHMBDMX8**

## S P E C I F I C A T I O N S H E E T

**V 1.2**

### DESCRIPTION

The device shall be a fault tolerant, self healing DMX buffer designed to fully isolate all outputs from each other.

The device shall fit customised front of house racks.

### FEATURES

- Fault tolerant, self healing DMX buffer designed to fully isolate all outputs from each other.
- Supplied with 8x5 pin XLR connectors.
- Each output is separately generated and boosted from the original DMX signal.
- Through connector and termination switch.
- Unique Magic Box interlocking enclosure facilitates rack mounting when used in pairs and truss mounting via captive nut insert.
- Designed for customised front of house racks.
- Built-in termination.

### ACCESSORIES

#### Model

Chroma-Q Magic Box pair of rack ears  
Chroma-Q Magic Box 8>4 DMX A/B Switch  
Chroma-Q Magic Box PS12 Power Supply

#### Part No.

MBEAR  
MBDMXAB  
MBPS12

### OVERALL SPECIFICATIONS

Net dimensions: Width (A): 220mm / 8.6"  
Height (B): 88mm / 3.5"  
Depth (C): 280mm / 11"

Net weight: 2.7kg / 6.0lbs

Shipping dimensions: Width: 250mm / 9.8"  
Height: 125mm / 4.9"  
Depth: 300mm / 11.8"

Shipping weight: 3.2kg / 7.1lbs

Colour: Black

Power: 100-240V, 50-60Hz

Power connector: IEC chassis male

DMX connector In: XLR5

DMX connector Out: 8 x XLR5

DMX connector Thru: XLR5




### ORDERING INFORMATION

#### Model

Chroma-Q Magic Box 8-Way DMX Buffer

#### Part No.

CHMBDMX8

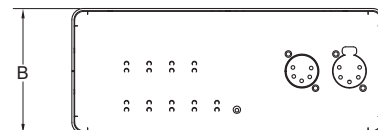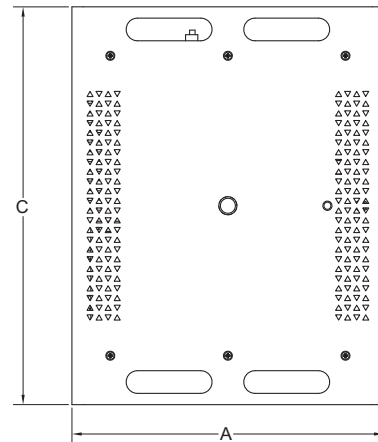

[www.chroma-q.com](http://www.chroma-q.com)

