



# Chroma-Q™ Magic Box™ 8>4 DMX A/B Switch

**Part No:  
CHMBDMXAB**

## S P E C I F I C A T I O N S H E E T

**V 1.2**

### DESCRIPTION

The device shall use a manual switch to change the DMX source between two lighting consoles e.g. master and back-up.

The device shall fit customised front of house racks.

### FEATURES

- Changes the DMX source between two x 2048 channel lighting consoles of up to 4 DMX universes each e.g. master and back-up.
- Controlled by simple but effective manually operated switch.
- For ensuring the highest possible level of reliability, the unit uses no power, electronics or software.
- Unique Magic Box interlocking enclosure facilitates rack mounting when used in pairs and truss mounting via captive nut insert.
- Designed for customised front of house racks.

### OVERALL SPECIFICATIONS




Net dimensions:	Width (A): 220mm / 8.6" Height (B): 88mm / 3.5" Depth (C): 280mm / 11"
Net weight:	2.7kg / 6.0lbs
Shipping dimensions:	Width: 250mm / 9.8" Height: 125mm / 4.9" Depth: 300mm / 11.8"
Shipping weight:	3.2kg / 7.1lbs
Colour:	black
DMX connector In:	8 x XLR5
DMX connector Out:	4 x XLR5

### ORDERING INFORMATION

Model	Part No.
Chroma-Q Magic Box 8>4 DMX A/B Switch	CHMBDMXAB

### ACCESSORIES

Model	Part No.
Chroma-Q Magic Box pair of rack ears	MBEAR
Chroma-Q Magic Box 8-Way DMX Buffer	MBDMX8
Chroma-Q Magic Box PS12 Power Supply	MBPS12

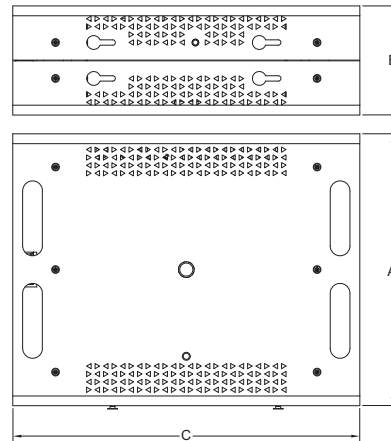

[www.chroma-q.com](http://www.chroma-q.com)

