



### FEATURES

- Highly Polished Aluminum Tubing
- 1.9" OD 6061-T6 Aluminum Tube Schd #40
- 0.145" Wall Thickness
- 1.05" OD Aluminum Bracing
- Ready To Accept Pre-Wired Lamp Bar
- Lamp Bar Drops Fixtures Through Bottom For Full Focus Ability
- Fabricated By Certified Welders
- Custom Lengths & Corners Available
- Available With Steel Spigots
- Powder Coating Available

This plated pre-rigged truss is designed where truss height is critical to accommodate a lamp bar fitted with standard PAR cans. The main chords are 1.9" OD 6061-T6 schedule 40 aluminum with 1.05" OD bracing. Lamp bars and casters can be supplied as optional items.



#### PLATED ALLOWABLE LOAD DATA

#### Maximum Allowable Uniform Loads



#### Maximum Allowable Center Point Loads



SPAN (ft.)	LOAD (#/ft.)	LOAD (#)	MAX. DEFL. (in.)	LOAD (#)	MAX. DEFL. (in.)
10	750	7500		7500	
20	260	5200		4000	
30	120	3600		2600	
40	70	2800		2000	
50	44	2200		1500	
60	32	1920		1400	


Connection: 5/8" Dia. x 2" Grade 8 Bolts

Weight Load Certified By Structural Engineer


### ORDERING INFORMATION

Item No.	Dimensions	Weight
12-02-120	15" x 23.5" x 120"	67 lbs.
12-02-093	15" x 23.5" x 93"	66 lbs.
12-02-060	15" x 23.5" x 60"	45 lbs.
12-02-004	4-Way Corner	35 lbs.
12-05-004	Casters/Set of 4	8 lbs.


**LAMP BARS AND CASTERS SOLD SEPARATELY**  
See Page 22 For Lampbar Information

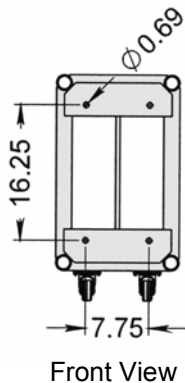

Top View



Side View

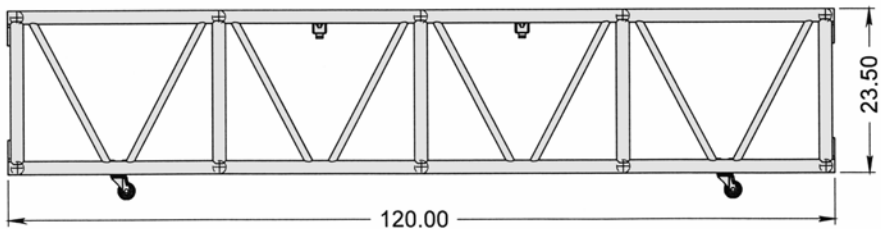

Standard Corner

