

#8680

ULTIMATE CONVERTER



PRODUCT OVERVIEW

This popular and powerful interface is used to “translate” or convert between older multiplex lighting protocols and DMX512.

FEATURES

- Multiple protocol support in a single unit
- Intuitive configuration with backlit menu driven LCD display
- Most multiplex protocols supported
- Security lockout function
- Input & output diagnostic functions
- Output protocol customization capability
- ETL Listed

SPECIFICATIONS

- Wide Range AC Input—85 - 240VAC, 50.60 Hz
- Operating Conditions: -10 to +50°C, 5-95% relative humidity, non-condensing

SUPPORTED STANDARDS AND PROTOCOLS

- USITT DMX512 –1990 \ ANSI E1.11 DMX512-A R2013
- AMX192—all versions
- Kliegl K96 and K100
- Colortran CMX and D192
- Electro Controls EC-Mux
- MicroPlex 1 & 2
- Strand D54
- AVAB 240 and 252 channels
- CE/ETL
- RoHS 2002/95/EC



WEIGHTS AND DIMENSIONS

- 2.5 lb (1.12 kg)
- 10.25" x 1.75" x 7" (260mm x 45mm x 180mm)


INCLUDED FURNISHINGS

- Installation/Operations manual
- Rack ears

DIMENSIONS

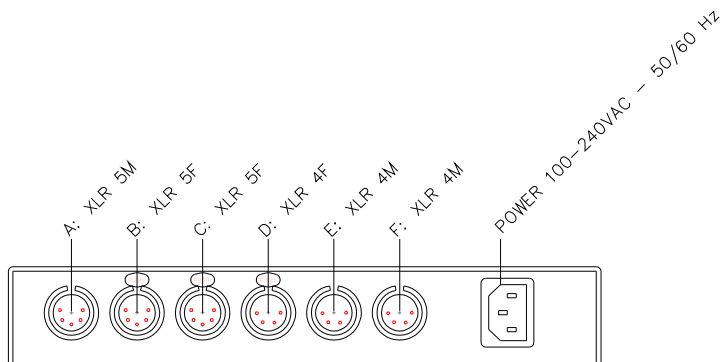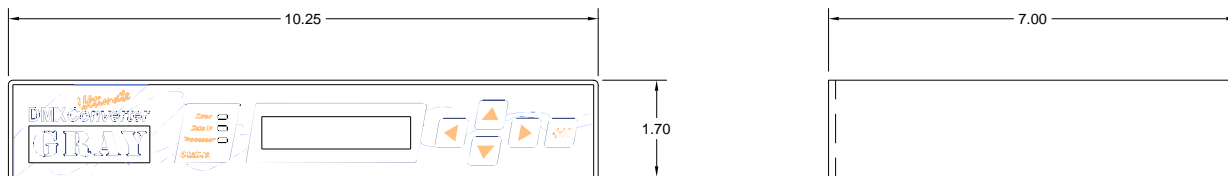

APPLICATION RISER

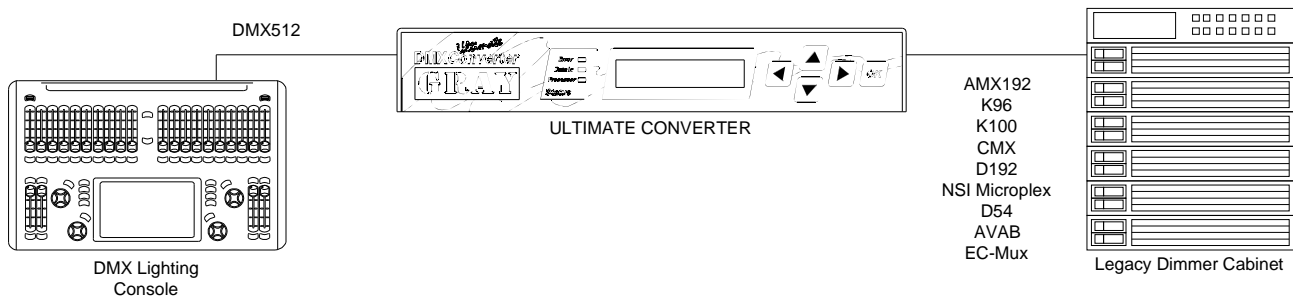

ORDERING INFORMATION

PART #	DESCRIPTION
8680	Pathway Ultimate Converter (NA and EU version)